

Part I

Secret-key cryptosystems basics

PROLOGUE - I.

Decrypt cryptotexts:

GBLMUB JOGPSNBUJLZ

VMNIR

RPNBMZ EBMFLP OFABKEFT

PROLOGUE - II.

Decrypt:

VHFUHW GH GHXA
VHFUHW GH GLHX,
VHFUHW GH WURLV,
VHFUHW GH WRXV.

CHAPTER 4: SECRET-KEY (SYMMETRIC) CRYPTOGRAPHY

- In this chapter we deal with some of the very old, or quite old, classical (secret-key or symmetric) cryptosystems and their cryptanalysis that were primarily used in the pre-computer era.
- These cryptosystems are too weak nowadays, too easy to break, especially with computers.
- However, these simple cryptosystems give a good illustration of several of the important ideas of the cryptography and cryptanalysis.
- Moreover, most of them can be very useful in combination with more modern cryptosystem - to add a new level of security.

BASICS

Cryptology (= cryptography + cryptanalysis)
has more than four thousand years long history.

Some historical observation

- People have always had fascination with keeping information away from others.
- Some people – rulers, diplomats, military people, businessmen – have always had needs to keep some information away from others.

Importance of cryptography nowadays

- **Applications:** cryptography is the key tool to make modern information transmission secure, and to create secure information society.
- **Foundations:** cryptography gave rise to several new key concepts of the foundation of informatics: one-way functions, computationally perfect pseudorandom generators, zero-knowledge proofs, holographic proofs, program self-testing and self-correcting, ...

Sound approaches to cryptography


- Shannon's approach based on **information theory** (Enemy could not have enough information to break a given cryptosystem).
- Current approach based on **complexity theory**. (Enemy could not have enough computation power to break a given cryptosystem).
- Very recent a new approach has been developed that is based on the laws and limitations of **quantum physics**. (Enemy would need to break laws of nature in order to break a given cryptosystem).

Paradoxes of modern cryptography:

- **Positive results** of modern cryptography are based on **negative results** of computational complexity theory.
- Computers, that were designed originally for **decryption**, seem to be now more useful for **encryption**.

The cryptography deals with problem of sending a **message** (plaintext, ciphertext, cleartext), through an **insecure channel**, that may be tapped by an **adversary** (eavesdropper, cryptanalyst), to a legal receiver.

Secret-key (symmetric) cryptosystems scheme:

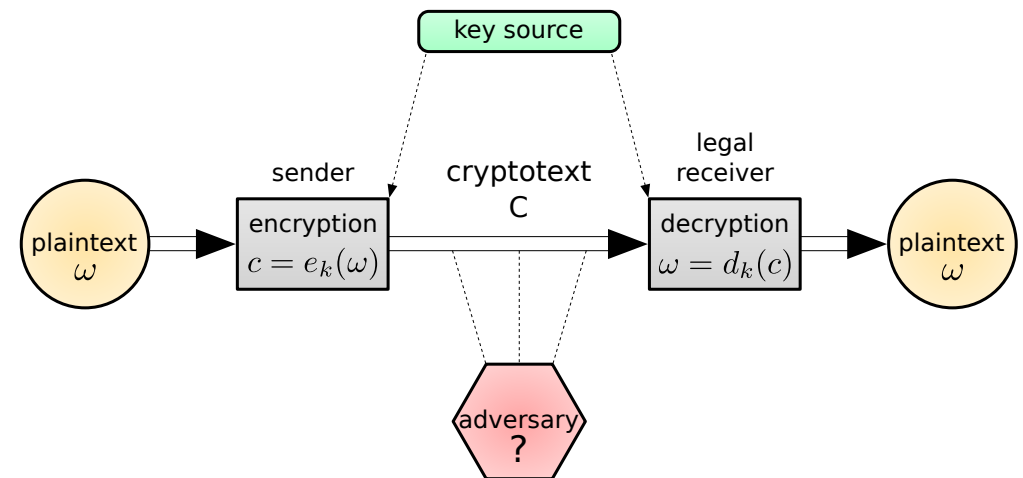

SECRET-KEY (PRIVATE-KEY - SYMMETRIC) CRYPTOSYSTEMS

A secret-key (private-key or symmetric) cryptosystem is the one where the sender and the recipient share a common and secret key.

Security of such a cryptosystem depends solely on the secrecy of shared key.

COMPONENTS of CRYPTOSYSTEMS:

Plaintext-space: P – a set of plaintexts (messages) over an alphabet Σ

Cryptotext-space: C – a set of cryptotexts (ciphertexts) over alphabet Δ

Key-space: K – a set of keys

Each key $k \in K$ determines an **encryption algorithm** e_k and an **decryption algorithm** d_k such that, for any plaintext w , $e_k(w)$ is the corresponding cryptotext and

$$w \in d_k(e_k(w)) \quad \text{or} \quad w = d_k(e_k(w)).$$

Note: As encryption algorithms we can use also **randomized algorithms**.

SECRET-KEY CRYPTOGRAPHY BASICS - SUMMARY

Symmetric cryptography relies on three algorithms:

Key generating algorithm which generates a secret key in a cryptographically (pseudo)random way.

Encryption algorithm which transforms a plaintext into a cryptotext using a secret key.

Decryption algorithm which transforms a cryptotext into the original plaintext using the same secret key.

Secret key cryptosystems provide secure transmission of messages along insecure channel provided **the secret keys are transmitted over an extra secure channel**.

SECURITY of CRYPTOSYSTEMS

There are three fundamentally different ways a cryptosystem/cipher can be seen as secure.

Unconditional security: is in the case it can be proven that the cryptosystem cannot be broken no matter how much power has the enemy (eavesdropper).

Computational security is in the case it can be proven that no eavesdropper can break the cryptosystem in polynomial (reasonable) time..

Practical security is in the case no one was able to break the cryptosystem so far after many years and many attempts.

The vision of codebreakers has changed through the history, depending on the tools used for encryption and cryptoanalysis.

- **Old times view:** Cryptology is a **black art** and cryptanalysts communicate with **dark spirits** and even are **followers of the devil**.
- **Pre-computers era view:** Codebreakers or cryptanalysts are linguistic alchemists - a mystical tribe attempting to discover meaningful texts in the apparently meaningless sequences of symbols.
- **Current view** Codebreakers and cryptanalysts are artists that can superbly use modern mathematics, informatics and computing supertechnology for decrypting encrypted messages.

- **First World War** was the war of chemists (deadly gases).
- **Second World War** was the war of physicists (atomic bombs).
- **Third World War** will be the war of informaticians (cryptographers and cryptanalysts).

BASIC TYPES of CLASSICAL SECRET-KEY CIPHERS

Substitution ciphers: are ciphers where units of plaintext are replaced by parts of cryptotext according a fixed rule.

Simple substitution ciphers operates on single letters.

Monoalphabetic (simple) substitution ciphers: are defined by a single fixed permutation π with encoding

$$e_{\pi}(a_1 a_2 \dots a_n) = \pi(a_1) \pi(a_2) \dots \pi(a_n)$$

Polyalphabetic (simple) substitutions systems may use different permutations at different positions of the plaintext.

Polygraphic (digraphic) substitution ciphers operate on larger, for instance on the length two) substrings of the plaintext.

Transposition ciphers do not replace but only rearrange order of symbols in the plaintext - sometimes in a complicated way.

PARTICULAR CRYPTOSYSTEMS

PARTICULAR CRYPTOSYSTEMS

SHIFT CIPHER is a simple monoalphabetic cipher that can be used to encrypt words in any alphabet.

In order to encrypt words in English alphabet we use:

Key-space: $K = \{1, 2, \dots, 25\}$

For any key $k \in K$, the encryption algorithm e_k for SHIFT CIPHER $SC(k)$ substitutes any letter by the letter occurring k positions ahead (cyclically) in the alphabet.

The decryption algorithm d_k for $SC(k)$ substitutes any letter by the one occurring k positions backward (cyclically) in the alphabet.

Example

$$e_2(\text{EXAMPLE}) = \text{GZCORNG},$$

$$e_3(\text{EXAMPLE}) = \text{HADPSOH},$$

$$e_1(\text{HAL}) = \text{IBM},$$

$$e_3(\text{COLD}) = \text{FROG}$$

ABCDEFGHIJKLMNOPQRSTUVWXYZ

Example Find the plaintext to the following cryptotext obtained by the encryption with SHIFT CIPHER with $k = ?$.

Decrypt the cryptotext: **VHFUHW GH GHXA, VHFUHW GH GLHX, VHFUHW GH WURLV, VHFUHW GH WRXV.**

Numerical version of $SC(k)$ is defined, for English, on the set $\{0, 1, 2, \dots, 25\}$ by the encryption algorithm:

$$e_k(i) = (i + k)(\text{mod } 26)$$

Numerical version of the cipher Atbash used in the Bible.

$$e(i) = 25 - i$$

EXAMPLE

Decrypt:

VHFUHW GH GHXA
VHFUHW GH GLHX,
VHFUHW GH WURLV
VHFUHW GH WRXV.

Solution:

Secret de deux
secret de Dieu,
secret de trois
secret de tous.

VATSYAYANA CIPHER - $SC(2)$

Vatsyayana was a Hindu philosopher, believed to be the author of Kamasutra and to live in the period 400 BC - 200 BC.

According to his Kamasutra, a girl needs to learn certain arts and certain tricks: to cook, to read and to write, and to send her lover secret messages which no one else would be able to decipher.

Vatsyayana even described such a cipher which is actually $SC(2)$.

This system is now believed, by some, to be the oldest cipher used.

POLYBIOUS CRYPTOSYSTEM - I

It is a digraphic cipher developed by Polybious in 2nd century BC.

Polybious was a Greek soldier, historian and for 17 years a slave in Rome.

POLYBIOUS CRYPTOSYSTEM - II

POLYBIOUS can be used to encrypt words of the English alphabet without J.

Key-space: Polybious checkerboards 5×5 with 25 English letters and with rows + columns labeled by symbols.

Example:

	F	G	H	I	J
A	A	B	C	D	E
B	F	G	H	I	K
C	L	M	N	O	P
D	Q	R	S	T	U
E	V	W	X	Y	Z

Encryption algorithm: Each symbol is substituted by the pair of symbols denoting the row and the column of the checkerboard in which the symbol is placed.

Example: KONIEC → BJCICHBIAJAH

Decryption algorithm: ???

FIRST INTERNET

Observation: Romans were able to create powerful optical information communication networks that allowed them to deliver information and orders very fast along long distances and this way to control efficiently huge territory and to make their armies flexible because they could deliver information and messages much faster than using horses.

It is expected that Romans already used Polybious cryptosystem.

KERCKHOFF'S PRINCIPLE

The basic philosophy of modern cryptanalysis is embodied in the following principle formulated in 1883 by **Jean Guillaume Hubert Victor Francois Alexandre Auguste Kerckhoffs von Nieuwenhof** (1835 - 1903).

The security of a cryptosystem must not depend on keeping secret the encryption algorithm. The security should depend only on *keeping secret the key*.

(Sir Francis R. Bacon (1561 - 1626))

- 1 Given e_k and a plaintext w , it should be **easy** to compute $c = e_k(w)$.
- 2 Given d_k and a cryptotext c , it should be **easy** to compute $w = d_k(c)$.
- 3 A cryptotext $e_k(w)$ should **not be much longer than the plaintext w** .
- 4 It should be **unfeasible** to determine w from $e_k(w)$ without knowing d_k .
- 5 The so called **avalanche effect** should hold: **A small change in the plaintext, or in the key, should lead to a big change in the cryptotext (i.e. a change of one bit of the plaintext should result in a change of all bits of the cryptotext, each with the probability close to 0.5).**
- 6 The cryptosystem should **not** be **closed under composition**, i.e. not for every two keys k_1, k_2 there is a key k such that

$$e_k(w) = e_{k_1}(e_{k_2}(w)).$$
- 7 The set of keys should be **very large**.

- Cryptotext should be unbreakable in practice.
- Cryptosystem should be convenient for the correspondence.
- The key should be easily remembered and changeable.
- The cryptotext should be transmissible by telegraph.
- The cryptosystem apparatus should be easily portable.
- The encryption machine should be relatively easy to use.

FOUR DEVELOPMENTS THAT CHANGED METHODS and IMPORTANCE of CRYPTOGRAPHY

- Wide use of telegraph - 1844.
- Wide use of radio transmission - 1895.
- Wide use of encryption/decryption machines - 1930.
- Wide use of internet.

CRYPTANALYSIS ATTACKS I

The aim of cryptanalysis is to get as much information about the plaintext or the key as possible.

Main types of cryptanalytic attacks

- 1 **Cryptotexts-only attack.** The cryptanalysts get cryptotexts $c_1 = e_k(w_1), \dots, c_n = e_k(w_n)$ and try to infer the key k , or as many of the plaintexts w_1, \dots, w_n as possible.
- 2 **Known-plaintexts attack** (given are some pairs [plaintext, cryptotext]) The cryptanalysts know some pairs $w_i, e_k(w_i), 1 \leq i \leq n$, and try to infer k , or at least w_{n+1} for a new cryptotext $e_k(w_{n+1})$.
- 3 **Chosen-plaintexts attack** (given are cryptotext for some chosen plaintexts). The cryptanalysts choose plaintexts w_1, \dots, w_n to get cryptotexts $e_k(w_1), \dots, e_k(w_n)$, and try to infer k or at least w_{n+1} for a new cryptotext $c_{n+1} = e_k(w_{n+1})$. (For example, if they get temporary access to the encryption machinery.)

4 Known-encryption-algorithm attack

The encryption algorithm e_k is given and the cryptanalysts try to get the decryption algorithm d_k .

5 Chosen-cryptotext attack (given are plaintexts for some chosen cryptotexts)

The cryptanalysts know some pairs

$$[c_i, d_k(c_i)], \quad 1 \leq i \leq n,$$

where the cryptotexts c_i have been chosen by the cryptanalysts. The aim is to determine the key. (For example, if cryptanalysts get a temporary access to decryption machinery.)

Let us assume that a clever Alice sends an encrypted message to Bob.

What can a bad enemy, called usually Eve (eavesdropper), do?

- Eve can read (and try to decrypt) the message.
- Eve can try to get the key that was used and then decrypt all messages encrypted with the same key.
- Eve can change the message sent by Alice into another message, in such a way that Bob will have the feeling, after he gets the changed message, that it was a message from Alice.
- Eve can pretend to be Alice and communicate with Bob, in such a way that Bob thinks he is communicating with Alice.

An eavesdropper can therefore be passive - Eve or active - Mallot.

BASIC GOALS of BROADLY UNDERSTOOD CRYPTOGRAPHY

Confidentiality: Eve should not be able to decrypt the message Alice sends to Bob.

Data integrity: Bob wants to be sure that Alice's message has not been altered by Eve.

Authentication: Bob wants to be sure that only Alice could have sent the message he has received.

Non-repudiation: Alice should not be able to claim that she did not send messages that she has sent.

Anonymity: Alice does not want Bob to find out who sent the message

HILL CRYPTOSYSTEM I

The polygraphic cryptosystem presented in this slide was probably never used. In spite of that this cryptosystem played an important role in the history of modern cryptography.

We describe Hill cryptosystem for a fixed n and the English alphabet.

Key-space: The set of all matrices M of degree n with elements from the set $\{0, 1, \dots, 25\}$ such that $M^{-1} \bmod 26$ exists.

Plaintext + cryptotext space: English words of length n .

Encoding: For a word w let c_w be the column vector of length n of the integer codes of symbols of w . ($A \rightarrow 0, B \rightarrow 1, C \rightarrow 2, \dots$)

Encryption: $c_c = M c_w \bmod 26$

Decryption: $c_w = M^{-1} c_c \bmod 26$

HILL CRYPTOSYSTEM - EXAMPLE

Example: A B C D E F G H I J K L M N O P Q R S T U V W X Y Z

$$M = \begin{bmatrix} 4 & 7 \\ 1 & 1 \end{bmatrix} \quad M^{-1} = \begin{bmatrix} 17 & 11 \\ 9 & 16 \end{bmatrix}$$

Plaintext: $w =$ LONDON

Encodings: $w_{LO} = \begin{bmatrix} 11 \\ 14 \end{bmatrix}$, $w_{ND} = \begin{bmatrix} 13 \\ 3 \end{bmatrix}$, $w_{ON} = \begin{bmatrix} 14 \\ 13 \end{bmatrix}$

Encryption : $Mw_{LO} = \begin{bmatrix} 12 \\ 25 \end{bmatrix}$, $Mw_{ND} = \begin{bmatrix} 21 \\ 16 \end{bmatrix}$, $Mw_{ON} = \begin{bmatrix} 17 \\ 1 \end{bmatrix}$

Cryptotext: MZVQRB

Theorem

If $M = \begin{bmatrix} a_{11} & a_{12} \\ a_{21} & a_{22} \end{bmatrix}$, then $M^{-1} = \frac{1}{\det M} \begin{bmatrix} a_{22} & -a_{12} \\ -a_{21} & a_{11} \end{bmatrix}$

Proof: Exercise

INVERTING INTEGER MATRICES modulo n

The basic idea to compute $M^{-1} \pmod{n}$ is simple:

Use the usual method to invert M in terms of rational numbers, and then replace each a/b by ab^{-1} , where $bb^{-1} \equiv 1 \pmod{n}$.

Example: Compute the inverse of the following matrix modulo 11:

$$M = \begin{pmatrix} 1 & 1 & 1 \\ 1 & 2 & 3 \\ 1 & 4 & 9 \end{pmatrix} \pmod{11}.$$

The standard inverse of M in rational numbers is

$$\frac{1}{2} \begin{pmatrix} 6 & -5 & 1 \\ -6 & 8 & -2 \\ 2 & -3 & 1 \end{pmatrix}$$

Since $2^{-1} \equiv 6 \pmod{11}$, the resulting matrix has the form

$$M^{-1} = \begin{pmatrix} 3 & 3 & 6 \\ 8 & 4 & 10 \\ 1 & 4 & 6 \end{pmatrix} \pmod{11}.$$

SESTER S. HILL

Hill published his cryptosystem, based on the ideas of Giovanni Bathista Porta (1535-1615), in the paper

Cryptography in an algebraic alphabet

in the journal **American Mathematical Monthly** in 1929.

Hill even tried to design a machine to use his cipher, but without a success.

SECRET-KEY (SYMMETRIC) CRYPTOSYSTEMS

A cryptosystem is called **secret-key cryptosystem** if some secret piece of information – the key – has to be agreed first between any two parties that have, or want, to communicate through the cryptosystem. **Example: CAESAR, HILL.** Another name is **symmetric cryptosystem (cryptography)**.

Two basic types of secret-key cryptosystems

- **substitution** based cryptosystems
- **transposition** based cryptosystems

Two basic types of substitution cryptosystems

- **monoalphabetic cryptosystems** – they use a fixed substitution – CAESAR, POLYBIUS
- **polyalphabetic cryptosystems** – substitution keeps changing during the encryption

A monoalphabetic cryptosystem with letter-by-letter substitution is uniquely specified by a permutation of letters, (number of permutations (keys) is 26!)

Example: Each **AFFINE cryptosystem** is given by two integers

$$0 \leq a, b \leq 25, \gcd(a, 26) = 1.$$

Encryption: $e_{a,b}(x) = (ax + b) \pmod{26}$

Example

$$a = 3, b = 5, \quad e_{3,5}(x) = (3x + 5) \pmod{26},$$

$$e_{3,5}(3) = 14, \quad e_{3,5}(15) = 24, \quad e_{3,5}(D) = O, \quad e_{3,5}(P) = Y$$

A B C D E F G H I J K L M N O P Q R S T U V W X Y Z
 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25

Decryption: $d_{a,b}(y) = a^{-1}(y - b) \pmod{26}$

The basic cryptanalytic attack against monoalphabetic substitution cryptosystems begins with a so called **frequency count**: the number of each letter in the cryptotext is counted. **The distributions of letters in the cryptotext is then compared with some official distribution of letters in the plaintext language.**

The letter with the highest frequency in the cryptotext is likely to be the substitute for the letter with highest frequency in the plaintext language The likelihood grows with the length of cryptotext.


Frequency counts in English:

	%		%		%
E	12.31	L	4.03	B	1.62
T	9.59	D	3.65	G	1.61
A	8.05	C	3.20	V	0.93
O	7.94	U	3.10	K	0.52
N	7.19	P	2.29	Q	0.20
I	7.18	F	2.28	X	0.20
S	6.59	M	2.25	J	0.10
R	6.03	W	2.03	Z	0.09
H	5.14	Y	1.88		
	70.02		24.71		5.27

and for other languages:

English	%	German	%	Finnish	%	French	%	Italian	%	Spanish	%
E	12.31	E	18.46	A	12.06	E	15.87	E	11.79	E	13.15
T	9.59	N	11.42	I	10.59	A	9.42	A	11.74	A	12.69
A	8.05	I	8.02	T	9.76	I	8.41	I	11.28	O	9.49
O	7.94	R	7.14	N	8.64	S	7.90	O	9.83	S	7.60
N	7.19	S	7.04	E	8.11	T	7.29	N	6.88	N	6.95
I	7.18	A	5.38	S	7.83	N	7.15	L	6.51	R	6.25
S	6.59	T	5.22	L	5.86	R	6.46	R	6.37	I	6.25
R	6.03	U	5.01	O	5.54	U	6.24	T	5.62	L	5.94
H	5.14	D	4.94	K	5.20	L	5.34	S	4.98	D	5.58

The 20 most common **digrams** are (in decreasing order) TH, HE, IN, ER, AN, RE, ED, ON, ES, ST, EN, AT, TO, NT, HA, ND, OU, EA, NG, AS. The six most common **trigrams** are: THE, ING, AND, HER, ERE, ENT.

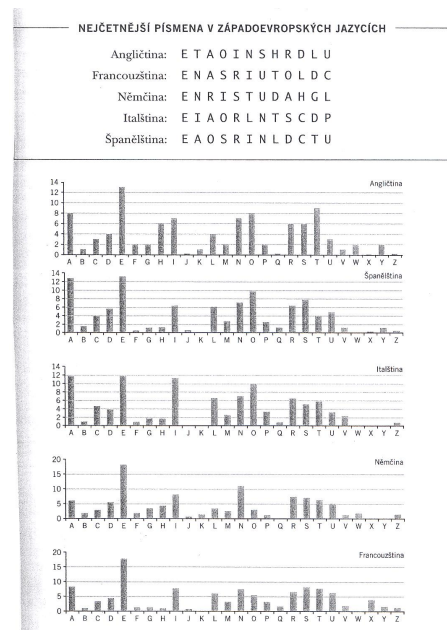

- V ANGLIČTINĚ
- Nejčastější písmena: e t a o i n s h r d l u
 - Nejčastější první písmena: t a s o i c p b s h m
 - Nejčastější poslední písmena: e t s d n r y o f l a g
 - Nejčastější dvojice písmen: t h e r o n a n r e h e i n e d n d h a a t
 - Nejčastější trojice písmen: t h e a n d t h a e n t i o n t i o f o r n d e
 - Nejčastější zdvojení písmen: s s e e t t f f l l m m o o
 - Nejčastější písmena následující po E: r d s n a c t m e p w o
 - Nejčastější dvojpísmenná slova: o f t o i n i t i s b e a s a t s o w e h e
 - Nejčastější trojpísmenná slova: t h e a n d f o r a r e b u t n o t y o u a l l
 - Nejčastější čtyřpísmenná slova: t h a t w i t h h a v e t h i s w i l l y o u r f r o m t h e y

	Czech	Slovak		
First resource	o	8.66	a	10.67
	e	7.69	o	9.12
	n	6.53	e	8.43
	a	6.21	i	5.74
	t	5.72	n	5.74
	v	4.66	s	5.02
	s	4.51	t	4.92
	i	4.35	v	4.60
Second resource:	l	3.84	k	3.96
	e	10.13	a	9.49
	a	8.99	o	9.34
	o	8.39	e	9.16
	i	6.92	i	6.81
	n	6.64	n	6.34
	s	5.74	s	5.94
	r	5.33	r	5.12
t	4.98	t	5.06	
v	4.50	v	4.85	

It was discovered, in 1987, that this technique was already described in 9th century in


a manuscript on deciphering cryptographic messages

written by the " philosopher of the Arabs", called

Abú Yúsúf Ya'qúb ibn Is-háq ibn as-Sabbáh ibn 'omrán ibn Ismail a-Kindi

He wrote 290 books on medicine, astronomy, mathematics, music,...

Frequency analysis was originally used to study Koran, to establish chronology of revelations by Muhammad in Koran.

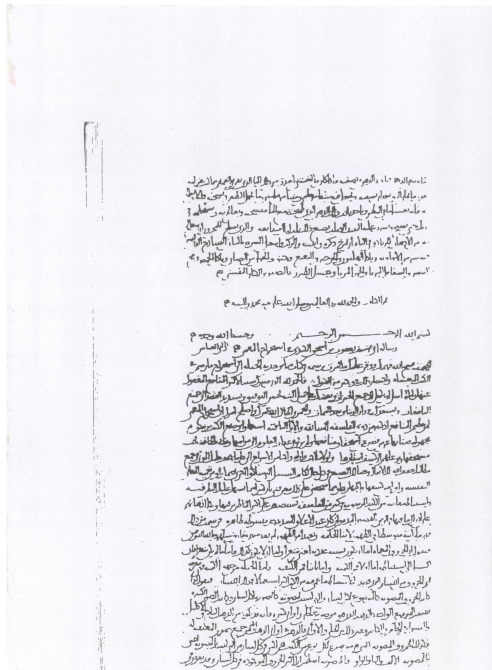

Cryptanalysis of a cryptotext encrypted using the AFFINE cryptosystem with an encryption algorithm

$$e_{a,b}(x) = (ax + b) \bmod 26 = (xa + b) \bmod 26$$

where $0 \leq a, b \leq 25, \gcd(a, 26) = 1$. (Number of keys: $12 \times 26 = 312$.)

Example: Assume that an English plaintext is divided into blocks of 5 letters and encrypted by an AFFINE cryptosystem (ignoring space and inter-punctuations) as follows:

B	H	J	U	H	N	B	U	L	S	V	U	L	R	U	S	L	Y	X	H
O	N	U	U	N	B	W	N	U	A	X	U	S	N	L	U	Y	J	S	S
W	X	R	L	K	G	N	B	O	N	U	U	N	B	W	S	W	X	K	X
H	K	X	D	H	U	Z	D	L	K	X	B	H	J	U	H	B	N	U	O
N	U	M	H	U	G	S	W	H	U	X	M	B	X	R	W	X	K	X	L
U	X	B	H	J	U	H	C	X	K	X	A	X	K	Z	S	W	K	X	X
L	K	O	L	J	K	C	X	L	C	M	X	O	N	U	U	B	V	U	L
R	R	W	H	S	H	B	H	J	U	H	N	B	X	M	B	X	R	W	X
K	X	N	O	Z	L	J	B	X	X	H	B	N	F	U	B	H	J	U	H
L	U	S	W	X	G	L	L	K	Z	L	J	P	H	U	U	L	S	Y	X
B	J	K	X	S	W	H	S	S	W	X	K	X	N	B	H	B	H	J	U
H	Y	X	W	N	U	G	S	W	X	G	L	L	K						

How to find the plaintext?

Frequency analysis of plaintext and frequency table for English:

X - 32	J - 11	D - 2	E	12.31	L	4.03	B	1.62
U - 30	O - 6	V - 2	T	9.59	D	3.65	G	1.61
H - 23	R - 6	F - 1	A	8.05	C	3.20	V	0.93
B - 19	G - 5	P - 1	O	7.94	U	3.10	K	0.52
L - 19	M - 4	E - 0	N	7.19	P	2.29	Q	0.20
N - 16	Y - 4	I - 0	I	7.18	F	2.28	X	0.20
K - 15	Z - 4	Q - 0	S	6.59	M	2.25	J	0.10
S - 15	C - 3	T - 0	R	6.03	W	2.03	Z	0.09
W - 14	A - 2		H	5.14	Y	1.88		
				70.02		24.71		5.27

First guess: $E = X, T = U$

Encodings: $4a + b = 23 \pmod{26}$

$xa + b = y$ $19a + b = 20 \pmod{26}$

Solutions: $a = 5, b = 3 \rightarrow a^{-1} = 21$

Translation table

crypto	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z
plain	P	K	F	A	V	Q	L	G	B	W	R	M	H	C	X	S	N	I	D	Y	T	O	J	E	Z	U

B H J U H N B U L S V U L R U S L Y X H
 O N U U N B W N U A X U S N L U Y J S S
 W X R L K G N B O N U U N B W S W X K X
 H K X D H U Z D L K X B H J U H B N U O
 N U M H U G S W H U X M B X R W X K X L
 U X B H J U H C X K X A X K Z S W K X X
 L K O L J K C X L C M X O N U U B V U L
 R R W H S H B H J U H N B X M B X R W X
 K X N O Z L J B X X H B N F U B H J U H
 L U S W X G L L K Z L J P H U U L S Y X
 B J K X S W H S S W X K X N B H B H J U
 H Y X W N U G S W X G L L K

provides from the above cryptotext the plaintext that starts with KGWTG CKTMO OTMIT DMZEG, which does not make sense.

Second guess: $E = X, A = H$

Equations $4a + b = 23 \pmod{26}$

$b = 7 \pmod{26}$

Solutions: $a = 4$ or $a = 17$ and therefore $a = 17$

This gives the translation table

crypto	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z
plain	V	S	P	M	J	G	D	A	X	U	R	O	L	I	F	C	Z	W	T	Q	N	K	H	E	B	Y

and the following plaintext from the above cryptotext

S A U N A I S N O T K N O W N T O B E A
 F I N N I S H I N V E N T I O N B U T T
 H E W O R D I S F I N N I S H T H E R E
 A R E M A N Y M O R E S A U N A S I N F
 I N L A N D T H A N E L S E W H E R E O
 N E S A U N A P E R E V E R Y T H R E E
 O R F O U R P E O P L E F I N N S K N O
 W W H A T A S A U N A I S E L S E W H E
 R E I F Y O U S E E A S I G N S A U N A
 O N T H E D O O R Y O U C A N N O T B E
 S U R E T H A T T H E R E I S A S A U N
 A B E H I N D T H E D O O R

OTHER EXAMPLES of MONOALPHABETIC CRYPTOSYSTEMS


Symbols of the English alphabet will be replaced by squares with or without points and with or without surrounding lines using the following rule:

A:	B:	C:	J:	K:	L:	S:	T:	U:
D:	E:	F:	M:	N:	O:	V:	W:	X:
G:	H:	I:	P:	Q:	R:	Y:	Z:	

For example the plaintext:


WE TALK ABOUT FINNISH SAUNA MANY TIMES LATER

results in the cryptotext:



Garbage in between method: the message (plaintext or cryptotext) is supplemented by "garbage letters".

Richelieu cryptosystem used sheets of card board with holes.



EXTREME CASES for FREQUENCY ANALYSIS

In 1969 Georges Perec published, in France,

La Disparition

a 200 pages novel in which there is no occurrence of the letter "e".

British translation, due to Gilbert Adair, has appeared in 1994 under the title

A void

Appendix A

The Opening Paragraph of *A Void* by Georges Perec,
translated by Gilbert Adair

Today, by radio, and also on giant hoardings, a rabbi, an admiral notorious for his links to masonry, a trio of cardinals, a trio, too, of insignificant politicians (bought and paid for by a rich and corrupt Anglo-Canadian banking corporation), inform us all of how our country now risks dying of starvation. A rumor, that's my initial thought as I switch off my radio, a rumor or possibly a hoax. Propaganda, I murmur anxiously—as though, just by saying so, I might allay my doubts—typical politicians' propaganda. But public opinion gradually absorbs it as a fact. Individuals start strutting around with stout clubs. "Food, glorious food!" is a common cry (occasionally sung to Bart's music), with ordinary hardworking folk harassing officials, both local and national, and cursing capitalists and captains of industry. Cops shrink from going out on night shift. In Mâcon a mob storms a municipal building. In Rocadamour ruffians rob a hangar full of foodstuffs, pillaging tons of tuna fish, milk and cocoa, as also a vast quantity of corn—all of it, alas, totally unfit for human consumption. Without fuss or ado, and naturally without any sort of trial, an indignant crowd hangs 26 solicitors on a hastily built scaffold in front of Nancy's law courts (this Nancy is a town, not a woman) and ransacks a local journal, a disgusting right-wing rag that is siding against it. Up and down this land of ours looting has brought docks, shops and farms to a virtual standstill.

First published in France as *La Disparition* by Editions Denoel in 1969, and in Great Britain by Harvill in 1994. Copyright © by Editions Denoel 1969, in the

Homophonic cryptosystems are natural generalization of monoalphabetic cryptosystems.

They are substitution cryptosystems in which each letter is replaced by arbitrarily chosen substitutes from fixed and disjoint sets of substitutes.

The number of substitutes of a letter is usually proportional to the frequency of the letter.

Though homophonic cryptosystems are not unbreakable, they are much more secure than ordinary monoalphabetic substitution cryptosystems.

The first known homophonic substitution cipher is from 1401.

EXAMPLES of HOMOPHONIC CRYPTOSYSTEMS - I.

Jindřich IV. Francouzský

Homofonní tabulku Jindřicha IV. (viz níže) určitě navrhol François Viète, oficiální králův kryptograf, luštitel a matematik. Jde o praktickou a účinnou šifru, jakou lze čekat od autora, který zná všechny triky i jejich meze. Většina souhlásek má více variant podle jejich skutečné četnosti. Slovník obsahuje pouhá tři slova.

Tabulka zahrnuje i značkovací symbol: ☉

To stačí k označení všech začátků i konců bezvýznamných úseků, na rozdíl od označování textových částí z Montmorencyho tabulky.

A	B	C	D	E	F	G	H	I	J	L
à	h	x	e	x	R	m	☉	☉	☉	œ
o		φ	ε	ξ	u			tt	tt	ç
			⊂	=				tt	tt	
M	N	O	P	Q	R	S	T	U	X	Y
u	q	p	š	no	ff	#	†	q	x	ç
q	do	gs			u	oo	z	q		
		#			Sj	š				

V kódovém seznamu najdeme jen tři slova:

odstavec = ☉ že = œ vy = ø

EXAMPLES of HOMOPHONIC CRYPTOSYSTEMS - I.

Jindřich IV. Francouzský

Homofonní tabulku Jindřicha IV. (viz níže) určitě navrhol François Viète, oficiální králův kryptograf, luštitel a matematik. Jde o praktickou a účinnou šifru, jakou lze čekat od autora, který zná všechny triky i jejich meze. Většina souhlásek má více variant podle jejich skutečné četnosti. Slovník obsahuje pouhá tři slova.

Tabulka zahrnuje i značkovací symbol: ☉

To stačí k označení všech začátků i konců bezvýznamných úseků, na rozdíl od označování textových částí z Montmorencyho tabulky.

A	B	C	D	E	F	G	H	I	J	L
à	h	x	e	x	R	m	☉	☉	☉	œ
o		φ	ε	ξ	u			tt	tt	ç
			⊂	=				tt	tt	
M	N	O	P	Q	R	S	T	U	X	Y
u	q	p	š	no	ff	#	†	q	x	ç
q	do	gs			u	oo	z	q		
		#			Sj	š				

V kódovém seznamu najdeme jen tři slova:
odstavec = ☉ že = œ vy = ø

Vévoda z Montmorency

A	B	C	D	E	F	G	H	I	J	L
z	t	6	ř	ob	9	u	ř	đ	φ	k
o	a	6	φ	σ	6	œ	ř	o		z
ř				ř		đ		e		
				đ				ř		
M	N	O	P	Q	R	S	T	U	X	Y
ò	z	>	ff	q	ř	ř	ř	u	x	ř
q	u	8	r		l	ř	ř	8	x	ř
□	f	x		r	f		z	u		
								u		
								z		

Playfair cryptosystem

Invented around 1854 by Ch. Wheatstone.

Key – a **Playfair square** is defined by a word **w** of length at most 25. In **w** repeated letters are then removed, remaining letters of alphabets (except j) are then added and resulting word is divided to form an 5 x 5 array (a **Playfair square**).

Encryption: of a pair of letters *x, y*

- 1 If *x* and *y* are in the same row (column), then they are replaced by the pair of symbols to the right (bellow) them.
- 2 If *x* and *y* are in different rows and columns they are replaced by symbols in the opposite corners of rectangle created by *x* and *y* - the order is important and needs to be agreed on.

Example: PLAYFAIR is encrypted as LCNMNFSC
Playfair was used in World War I by British army.

Playfair square:	S	D	Z	I	U
	H	A	F	N	G
	B	M	V	Y	W
	R	P	L	C	X
	T	O	E	K	Q

VIGENERE and AUTOCLAVE cryptosystems

Several of the following polyalphabetic cryptosystems are modification of the CAESAR cryptosystem.

Design of cryptosystem: First step: A 26×26 table is first designed with the *i*-th row containing all symbols of alphabet, in the cyclic way, starting with *i*-th symbol of the alphabet. This way *i*-th column represent the CAESAR shift $CS(i - 1)$ starting with the symbol of the first row.

Second step: For a plaintext *w* a key *k* has to be chosen that should be a word of the same length as *w*.

Encryption: the *i*-th letter of the plaintext - *w_i* - is encrypted by the letter from the *w_i*-row and *k_i*-column of the table.

VIGENERE cryptosystem is actually a cyclic, key driven, version of the CAESAR cryptosystem.

IMPORTANT EXAMPLES

VIGENERE-key cryptosystem: a short keyword *p* is chosen and periodically repeated to form the key to be used

$$k = \text{Prefix}_{|w|} p^{\circ\circ}$$

AUTOCLAVE-key cryptosystem: a short keyword is chosen and appended by plaintext

VIGENERE and AUTOCLAVE cryptosystems

Vigenère table:	A B C D E F G H I J K L M N O P Q R S T U V W X Y Z B C D E F G H I J K L M N O P Q R S T U V W X Y Z A C D E F G H I J K L M N O P Q R S T U V W X Y Z A B D E F G H I J K L M N O P Q R S T U V W X Y Z A B C E F G H I J K L M N O P Q R S T U V W X Y Z A B C D F G H I J K L M N O P Q R S T U V W X Y Z A B C D E G H I J K L M N O P Q R S T U V W X Y Z A B C D E F H I J K L M N O P Q R S T U V W X Y Z A B C D E F G I J K L M N O P Q R S T U V W X Y Z A B C D E F G H J K L M N O P Q R S T U V W X Y Z A B C D E F G H I K L M N O P Q R S T U V W X Y Z A B C D E F G H I J L M N O P Q R S T U V W X Y Z A B C D E F G H I J K M N O P Q R S T U V W X Y Z A B C D E F G H I J K L N O P Q R S T U V W X Y Z A B C D E F G H I J K L M O P Q R S T U V W X Y Z A B C D E F G H I J K L M N P Q R S T U V W X Y Z A B C D E F G H I J K L M N O Q R S T U V W X Y Z A B C D E F G H I J K L M N O P R S T U V W X Y Z A B C D E F G H I J K L M N O P Q S T U V W X Y Z A B C D E F G H I J K L M N O P Q R T U V W X Y Z A B C D E F G H I J K L M N O P Q R S U V W X Y Z A B C D E F G H I J K L M N O P Q R S T V W X Y Z A B C D E F G H I J K L M N O P Q R S T U W X Y Z A B C D E F G H I J K L M N O P Q R S T U V X Y Z A B C D E F G H I J K L M N O P Q R S T U V W Y Z A B C D E F G H I J K L M N O P Q R S T U V W X Z A B C D E F G H I J K L M N O P Q R S T U V W X Y
-----------------	--

Keyword: H A M B U R G
 Plaintext: I N J E D E M M E N S C H E N G E S I C H T E S T E H T S E I N E G
 Vigenere-key: H A M B U R G H A M B U R G H A M B U R G H A M B U R G H A M B U R
 Autoclave-key: H A M B U R G I N J E D E M M E N S C H E N G E S I C H T E S T E H
 Vigenere-encrypt.: P N V F X V S T E Z T W Y K M U G Q T C T N A E E U Y Z Z E U O Y X
 Autoclave-encrypt.: P N V F X V S U R W W F L Q Z K R K K J L G K W L M J A L I A G I N

COMMENT

- Autoclave-key cipher is also called autokey cipher.
- So called **running-key cipher** uses very long key that is a passage from a book (for example from Bible).



The encryption method that is commonly called as Vigenere method was actually discovered in 1553 by Giovan Batista Belaso.

VIGÉNERE CRYPTOSYSTEM

- Vigenère work culminated in his *Traicté des Chiffres* - "A treatise on secret writing" in 1586.
- VIGENERE cryptosystem was practically not used for the next 200 years, in spite of its perfection.
- It seems that the reason for ignorance of the VIGENERE cryptosystem was its apparent complexity.

CRYPTANALYSIS of cryptotexts produced by VIGENERE-key cryptosystems

- Task 1 – to find the length of the keyword

Kasiski's (Prussian officier) method (published in 1862) - invented also by Charles Babbage (1853 - unpublished).

Basic observation: If a subword of a plaintext is repeated at a distance that is a multiple of the length of the keyword, then the corresponding subwords of the cryptotext have to be the same.

Example, cryptotext:

CHRGQPWQOEIRULYANDOSHCHRIZKEBUSNOFKYWROPDCHRGAXBNRHROAKERBKSchRIWK

Substring "CHR" occurs in positions 1, 21, 41, 66: expected keyword length is therefore 5.

Method. Determine the greatest common divisor of the distances between identical subwords (of length 3 or more) of the cryptotext.



Friedman method to determine the length of the keyword: Let n_i be the number of occurrences of the i -th letter in the cryptotext.

Let L be the length of the keyword.

Let n be the length of the cryptotext.

Then it holds, as shown on next slide:

$$L = \frac{0.027n}{(n-1)I - 0.038n + 0.065}, \quad I = \sum_{i=1}^{26} \frac{n_i(n_i-1)}{n(n-1)}$$

Once the length of the keyword is found it is easy to determine the key using the frequency analysis method for monoalphabetic cryptosystems.

DERIVATION of the FRIEDMAN METHOD I

- 1 Let n be the length of a cryptotext w and o_i be the number of occurrences of the i -th symbol of the alphabet in w . The probability that if one selects a pair of symbols from w , then they are the same is

$$I = \frac{\sum_{i=1}^{26} o_i(o_i-1)}{n(n-1)} = \sum_{i=1}^{26} \frac{\binom{o_i}{2}}{\binom{n}{2}}$$

and it is called the **index of coincidence**.

- 2 Let p_i be the probability that a randomly chosen symbol is the i -th symbol of the alphabet. The probability that two randomly chosen symbols are the same is

$$\sum_{i=1}^{26} p_i^2$$

For an English text one has

$$\sum_{i=1}^{26} p_i^2 = 0.065$$

For a randomly chosen text:

$$\sum_{i=1}^{26} p_i^2 = \sum_{i=1}^{26} \frac{1}{26^2} = 0.038$$

In addition it holds:

$$I = \sum_{i=1}^{26} p_i^2$$

DERIVATION of the FRIEDMAN METHOD - II.

Assume that a cryptotext is written into L columns headed by the letters of the keyword

key letters	S_1	S_2	S_3	...	S_L
	x_1	x_2	x_3	...	x_L
	x_{L+1}	x_{L+2}	x_{L+3}	...	x_{2L}
	x_{2L+1}	x_{2L+2}	x_{2L+3}	...	x_{3L}

First observation Each column is obtained using the CAESAR cryptosystem. Probability that two randomly chosen letters are the same in

- the same column is 0.065.
- different columns is 0.038.

The number of pairs of letters in the same column: $L \cdot \frac{1}{2} \cdot \frac{n}{L} \left(\frac{n}{L} - 1 \right) = \frac{n(n-L)}{2L}$

The number of pairs of letters in different columns: $\frac{L(L-1)}{2} \cdot \frac{n^2}{L^2} = \frac{n^2(L-1)}{2L}$

The expected number A of pairs of equals letters is $A = \frac{n(n-L)}{2L} \cdot 0.065 + \frac{n^2(L-1)}{2L} \cdot 0.038$

Since $I = \frac{A}{\frac{n(n-1)}{2}} = \frac{1}{L(n-1)} [0.027n + L(0.038n - 0.065)]$

one gets the formula for L from one of the previous slides.

BREAKING VIGENER CRYPTOSYSTEM

Kasiski method and the index of coincidence can be used in the following way to break a VIGENERE cryptosystem - basic algorithm.

for all guesses of the length m of the key
(obtained using Kasiski method) **do**

 write cryptotext in an array with m columns - row by row;
 check if index of coincidence of each column is high;
 if yes you have the length of key;

to decode columns use decoding method for Caesar

ONE-TIME PAD CRYPTOSYSTEM – Vernam's cipher

Binary case:

plaintext w
key k
cryptotext c } are all binary words of the same length

Encryption: $c = w \oplus k$

Decryption: $w = c \oplus k$

Example:

$w = 101101011$

$k = 011011010$

$c = 110110001$

What happens if the same key is used twice or 3 times for encryption?

If $c_1 = w_1 \oplus k, c_2 = w_2 \oplus k, c_3 = w_3 \oplus k$

then

$$c_1 \oplus c_2 = w_1 \oplus w_2$$

$$c_1 \oplus c_3 = w_1 \oplus w_3$$

$$c_2 \oplus c_3 = w_2 \oplus w_3$$

NEVER USE ONE-TIME PAD TWICE WITH THE SAME KEY

The reuse of keys by Soviet Union spies (due to the manufacturer's accidental duplication of one-time-pad pages) enabled US cryptanalysts to unmask the atomic spy Klaus Fuchs in 1949.

PERFECT SECRET-KEY CRYPTOSYSTEMS- I.

By Shannon a cryptosystem is secure if *a posteriori* distribution of the plaintext P after we know the cryptotext C is equal to the *a priori* distribution of the plaintext.

Formally, for all pairs plaintext p and cryptotext c such that $Prob[C = c] \neq 0$ it holds that

$$Prob[P = p|C = c] = Prob[P = p].$$

Example ONE-TIME PAD cryptosystem is perfectly secure because for any pair c, p there exists a key k such that

$$c = k \oplus p.$$

PERFECT SECURITY of ONE-TIME PAD

One-time pad cryptosystem is **perfectly secure** because

For any cryptotext

$$c = c_1 c_2 \dots c_n$$

and any plaintext

$$p = p_1 p_2 \dots p_n$$

there exists a key (and all keys were chosen with the same probability)

$$k = k_1 k_2 \dots k_n$$

such that

$$c = p \oplus k$$

Did we gain something? The problem of secure communication of the plaintext got transformed to the problem of secure communication of the key of the same length.

Yes:

1 ONE-TIME PAD cryptosystem is used in critical applications

2 It suggests an idea how to construct practically secure cryptosystems.

IDEA: Find a simple way to generate almost perfectly random key shared by both communicating parties and make them to use this key for one-time pad encoding and decoding!!!!

PERFECT SECURITY of ONE-TIME PAD ONCE MORE

For

every cryptotext c

every element p of the set of plaintexts has the same probability

that p was the plaintext the encryption of which provided c as the cryptotext.

CURRENT ROLE of SUBSTITUTION SYSTEMS

- Substitution ciphers alone are no longer of use.
- They can be used in a combination with other ciphers as product ciphers.
- However, from a sufficiently abstract perspective, modern bit-oriented block ciphers (DES, AES,...) can be viewed as substitution ciphers on enormously large binary alphabets.
- Moreover, modern block ciphers often include smaller substitution tables, called S-boxes.

TRANSPOSITION CRYPTOSYSTEMS

The basic idea is very simple: **permute the plaintext to get the cryptotext**. Less clear it is how to specify and perform efficiently permutations.

One idea: choose n , write plaintext into rows, with n symbols in each row and then read it by columns to get cryptotext.

Example

I	N	J	E	D	E	M	M	E	N
S	C	H	E	N	G	E	S	I	C
H	T	E	S	T	E	H	T	S	E
I	N	E	G	E	S	C	H	I	C
H	T	E	T	O	J	E	O	N	O

Cryptotexts obtained by transpositions, called **anagrams**, were popular among scientists of 17th century. They were used also to encrypt scientific findings.

Newton wrote to Leibniz

$$a^7 c^2 d^2 e^{14} f^2 i^7 l^3 m^1 n^8 o^4 q^3 r^2 s^4 t^8 v^{12} x^1$$

what stands for: "data aequatione quodcumque fluentes quantitates involvente, fluxiones invenire et vice versa"

Example

$$a^2 c d e f^3 g^2 i^2 j k m n^3 o^5 p r s^2 t^2 u^3 z$$

Solution: ??

This will be an example showing that cryptanalysis often require qualified guessing.
Keyword Caesar cryptosystem is given by choosing an integer $0 < k < 25$ and a string, called **keyword**, of length at most 25 with all letters different.

The keyword is then written bellow the English alphabet letters, beginning with the k -symbol, and the remaining letters are written in the alphabetic order and cyclically after the keyword.

Example: keyword: HOW MANY ELKS, $k = 8$

```

0           8
A B C D E F G H I J K L M N O P Q R S T U V W X Y Z
P Q R T U V X Z H O W M A N Y E L K S B C D F G I J
    
```

Example Decrypt the following cryptotext encrypted using the KEYWORD CAESAR and determine the keyword and k

```

T IVD ZCRTIC FQNIQ TU TF
Q XAVFCZ FEQXC PCQUCZ WK
Q FUVBC FNRRTXTCIUAK WTY
DTUP MCFECXU UV UPC BVANHC
VR UPC FEQXC UPC FUVBC
XVIUQTIF FUVICF NFNQA AK
VI UPC UVE UV UQGC Q FQNIQ
WQUP TU TF QAFV ICXCFFQMK
UPQU UPC FUVBC TF EMVECM AK
PCQUCZ QIZ UPQU KVN PQBC
UPC RQXTATUK VR UPMVDTIY
DQUCM VI UPC FUVICF
    
```

Step 1. Make the frequency counts:

	Number		Number		Number
U	32	X	8	W	3
C	31	K	7	Y	2
Q	23	N	7	G	1
F	22	E	6	H	1
V	20	M	6	J	0
P	15	R	6	L	0
T	15	B	5	O	0
I	14	Z	5	S	0
A	8	D	4		
180=74.69%		54=22.41%		7=2.90%	

Step 2. Cryptotext contains two one-letter words T and Q. They must be A and I. Since T occurs once and Q three times it is likely that T is I and Q is A.

The three letter word UPC occurs 7 times and all other 3-letter words occur only once. Hence

UPC is likely to be THE.

Let us now decrypt the remaining letters in the high frequency group: F,V,I

From the words TU, TF $\Rightarrow F=S$
 From UV $\Rightarrow V=O$
 From VI $\Rightarrow I=N$

So we have: T=I, Q=A, U=T, P=H, C=E, F=S, V=O, I=N and now in

```

T IVD ZCRTIC FQNIQ TU TF
Q XAVFCZ FEQXC PCQUCZ WK
Q FUVBC FNRRTXTCIUAK WTY
DTUP MCFECXU UV UPC BVANHC
VR UPC FEQXC UPC FUVBC
XVIUQTIF FUVICF NFNQA AK
VI UPC UVE UV UQGC Q FQNIQ
WQUP TU TF QAFV ICXCFFQMK
UPQU UPC FUVBC TF EMVECM AK
PCQUCZ QIZ UPQU KVN PQBC
UPC RQXTATUK VR UPMVDTIY
DQUCM VI UPC FUVICF
    
```

we have several words with only one unknown letter what leads to another guesses and the table:

```

A B C D E F G H I J K L M N O P Q R S T U V W X Y Z
L V E W P S K M N ? Y ? R U ? H A F ? I T O B C G D
    
```

This leads to the keyword **CRYPTOGRAPHY GIVES ME FUN** and $k = 4$ -

SHANNON'S CONTRIBUTIONS to UNDERSTANDING CIPHERS

- For understanding the quality of secret key ciphers of large importance was Claude Shannon's paper **A Communication Theory of Secrecy systems**.
- Shannon introduced several advanced mathematical techniques to scientific cryptography.
- Shannon demonstrated several important features of the statistical nature of natural languages that makes solutions to many problems of ciphers very straightforward.
- One of the main contributions of the above Shannon's paper was the development of a measure, called **unicity distance**, of the cryptographic strength of the ciphers encoding messages of natural languages.

UNICITY DISTANCE - MOTIVATION - INFORMALLY

The unicity distance of a cipher encrypting natural language plaintexts is the minimum of cryptotexts required for computationally unlimited adversaries to decrypt cryptotext uniquely (to recover uniquely the key that was used).

- **Example 1:** Let **WNAIW** be the cryptotext obtained by encoding an English word by Vigenere key cipher with the key of the length 5. Can one determine uniquely the plaintext?
- One can find two fully satisfactory solutions: **RIVER, WATER** and many nonsatisfactory as **KHDOP, SXOOS**, but not the unique plaintext.
- **Example 2:** Let cryptotext **FJKFPO** was obtained by encrypting an English text using a monoalphabetic substitution cipher. Can we find the unique plaintext?
- Possible plaintexts are **thatis, ofyour, season, oxford, thatof,....** but there is no way to determine the plaintext uniquely.

UNICITY DISTANCE - BASIC RESULT

The expected unicity distance $U_{C,K,L}$ of a cipher C and a key set K for a plaintext language L can be shown to be:

$$U_{C,K,L} = \frac{H_K}{D_L}$$

where H_K is the entropy of the key space (e.g. 128 for 2^{128} equiprobably keys), D_L is the plaintext redundancy in bits per character.

Redundancy: Each character in English can convey $\lg(26) = 4.7$ bits of information.

However, the average amount of actual information carried per character in a meaningful English text is only about 1.5 bits per character.

So the plaintext redundancy is $4.7 - 1.5 = 3.2$.

EXAMPLES

Simple monoalphabetic substitution cipher: Number of possible keys is $26! \approx 2^{88.4}$. Assuming that all keys (permutations) are equally probable we have $H_K = \lg(26!) = 88.4$ bits.

Since for English text $D_L = 3.2$, we have for the unicity distance

$$U = \frac{88.4}{3.2} = 28$$

Conclusion Given at least 28 characters of the cryptotext it should be possible, at least theoretically, to find unique plaintext (and key).

- Other ciphers:**
- **Atbash cipher:** Number of keys: 1; unicity distance: 0 characters
 - **Caesar cipher:** Number of keys: 25; unicity distance: 2 characters
 - **Affine cipher:** Number of keys: 311; unicity distance: 3
 - **Playfair cipher:** Number of keys: 25!; unicity distance: 27

- Observe that Unicity distance is only a theoretical minimum.
- In general one may need much more characters to reliably break a cipher - say 100 for simple monoalphabetic substitution cipher.
- Unicity distance is a useful theoretical measure, but it does not say much about security of a block cipher when attacked by an adversary with real-world (limited) resources.
- Unicity distance is not a measure of how much cryptotext is needed for cryptanalysis, but how much cryptotext is required for there to be only one reasonable solution for cryptanalysis.

Redundancy of natural languages is of the key importance for cryptanalysis.

Would all letters of a 26-symbol alphabet have the same probability, a character would carry $\lg 26 = 4.7$ bits of Information.

The estimated average amount of information carried per letter in a meaningful English text is 1.5 bits.

The unicity distance of a cryptosystem is the minimum length of the cryptotext required by a computationally unlimited adversary to recover the unique encryption key.

Empirical evidence indicates that if a simple substitution cryptosystem is applied to a meaningful English message, then about 25 cryptotext characters are enough for an experienced cryptanalyst to recover the plaintext.

- The unicity distance of a cryptosystem is a number that indicates the amount of cryptotext required in order to uniquely determine the plaintext.
- It is a function of the length of the key used for encryption and the statistical nature of the plaintext language.
- Outcome: It can be shown that enough time it is guaranteed that any cipher can be broken given cryptotexts of such total length that unicity distance is 1.
- Formally, the unicity distance is given by

$$\frac{H(K)}{|M| - H(M)}$$

where

- $H(k)$ is information content of the key.
- $|M|$ je information content per symbol of the message assuming assuming that all symbols are equally likely.
- $H(M)$ is information content per symbol of the message.

- If K is chosen random, then $H(K) = |K|$, so for randomly chosen letters in English, $H(K) = |K| = \lg(26) = 4.7$ bits.
- $H(M)$ has been empirically found to be 2.9 bits for English.
- Therefore the unicity distance for English is 1 when $|M| = (4.7/1.8)|K|$

ANAGRAMS – EXAMPLES

German:

IRI BRÄTER, GENF	Briefträgerin
FRANK PEKL, REGEN	...
PEER ASSSTIL, MELK	...
INGO DILMR, PEINE	...
EMIL REST, GERA	...
KARL SORDORT, PEINE	...

English:

algorithms	logarithms
antagonist	stagnation
compressed	decompress
coordinate	decoration
creativity	reactivity
deductions	discounted
descriptor	predictors
impression	permission
introduces	reductions
procedures	reproduces

SOME SOLUTIONS

FRANK PEKL, REGEN
PEER ASTIL, MELK
INGO DILMR, PEINE
EMIL REST, GERA
KARL SORDORT, PEINE

Krankenpfleger
Kapellmeister
Diplomengineer
Lagermeister
Personaldirector

APPENDIX I

APPENDIX I

FAMOUS CRYPTOGRAPHERS

- Girolamo Cardano (1501-1576) - father of probability theory
- De la Bigotiere Viete (1540-1603) - father of modern algebra.
- Antoine Rosignol (father of Cryptology for France)
- John Wallis (1616-1703) (father of Cryptology for England)
- Thomas Jefferson (1743-1826) - Father of American Cryptography)
- Charles Babbage (broke Vigenere cryptosystem - the inventor of the first universal computer).
- Allan Turing (broke ENIGMA, design BOMBS, basic result on computer universality).

- In the middle age, messages were mostly encrypted with "code books" (codebooks).
- In this set-up communicating parties, say Alice and Bob, shared some secret information, called the codebook.
- Such a codebook can be a simple letter-to-letter substitution or a more complex word-by-word substitution.
- **Communication:** A sender encrypts her message using secret codebook and the receiver uses the same codebook to decrypt the encrypted message.
- An eavesdropper cannot, in theory, decrypt the message because she does not possess the secret codebook.
- A more modern term for "codebook" is the "key".
- Codebooks were intensively used during the first World War. Some had up to 100 000 encoding rules. The fact that allies were able to obtain huge codebooks from several destroyed war ships helped Allies much.
- Till recently it was assumed that secret codebooks are necessary for secret communication.

- Nomenclators were in use from the end of 14th century for 450 years.
- Nomenclators combined a substitution cryptosystem (in which symbols were replaced by numbers) with codebook ciphers in which words were replaced by numbers.
- At the beginning codebook had codes only for names of people (therefore such a name - nomenclators), later codes were used also for names of places and so on.
- Some nomenclators had huge codebooks, up to 50 000 entries.
- Famous was the nomenclator designed by very famous French cryptologist Rosignol, for Ludvig XIV, that was not broken for several hundred of years.
- It was the design of the telegraph and the need for *field ciphers* to be used in combat that ended the massive use of nomenclators and started a new history of cryptography dominated by polyalphabetic substitution cryptosystems.